


Keysight Technologies

55280B Linear Measurement Kit

Data Sheet

Basic Equipment

Keysight 5530 Laser Calibration System
 Keysight 55280B Linear Optics Kit

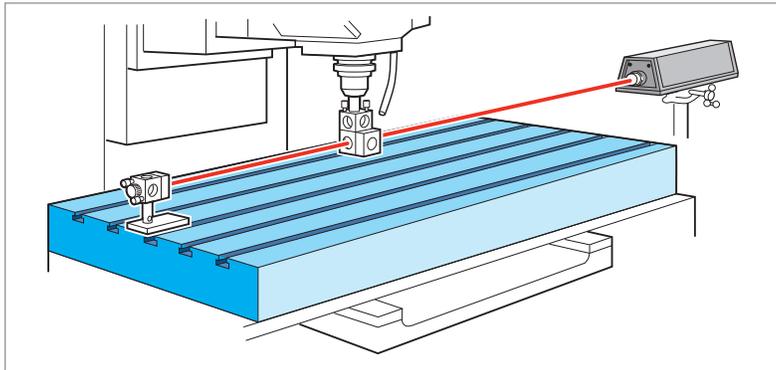

Optical setup for linear measurements

The following specifications assume the Keysight Technologies, Inc. 5530 Laser Calibration System is in used, and the temperature of all optical components is stabilized in the range 15 °C to 25 °C.

Measurement Range

Up to 40 m (130 ft) with linear optics

Up to 80 m (260 ft) with long range option

Measurement Accuracy

Temperature range	E1738A air sensor	In vacuum †
0 – 40 °C (32 ° – 104 °F)	±0.4 ppm	±0.1 (±0.02) ppm

† Vacuum accuracy is ±0.02 ppm if the 5519A/B laser head is calibrated to MIL-STD 45662A.

Measurement Resolution

Optics	Resolution
Linear optics (10766A)	1 nm (0.04 μin)
Plane mirror optics (10706A/B)*	0.5 nm (0.02 μin)
High resolution plane mirror optics (10716A) *†	0.25 nm (0.01 μin)

* Requires the 10724A Plane Mirror Reflector. Since alignment of these optics is much more sensitive than for linear optics, linear optics are recommended for general use.

† Aperture distance of 10716A is 12.7 mm, whereas 5519A is 11 mm.

Linear measurements are made at multiple points along a machine's travel path to measure linear displacement and velocity.

The purpose of the measurement is to document capability and, when possible, improve positioning accuracy along an axis for any machine that requires positioning accuracy and velocity control through a compensation table.

Additional capabilities include long-term thermal drift test which can be performed over hours or days, showing possible effects of temperature on geometry.

Components included in the 55280B Linear Measurement Kit

Description	Quantity
10766A Linear interferometer	1
10767A Linear retroreflector	2
10784A Base	2
10785A Height adjuster	3
Post (~ 100 mm)	3

Related Literature

Publication title	Publication No.
<i>Keysight 5530 Laser Calibration System Brochure</i>	5989-9354EN
<i>Keysight 5530 Laser Calibration System Data Sheet</i>	5989-9712EN
<i>Keysight 5530 Laser Calibration System Flyer</i>	5989-9707EN



For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
 (BP-09-04-14)

www.keysight.com/find/5530

This information is subject to change without notice.
 © Keysight Technologies, 2012 - 2014
 Published in USA, August 2, 2014
 5990-9311EN
www.keysight.com